




## Pre-crimp Wire Mesh Curtain Specifications

When ordering, please specify:

1. Weave Type
2. Wire Diameter (D1 x D2)
3. Hole Size (P1 x P2)
4. Roll Width (RW)
5. Roll Length (RL)

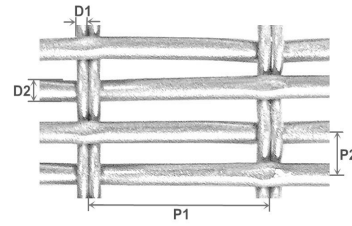

Pre-crimp Wire Decorative Mesh

### Technical Parameter

	Pre-crimp Wire		Flat Top Wire		Open Area		Weight Kgs/m <sup>2</sup>	
	Nos. x D1 (mm)	P1 (mm)	D2 (mm)	P2 (mm)	mm	%	Stainless Steel	Copper
50/50	1 x 4.0	54.0	4.0	54.0	50.0 x 50.0	86	3.76	4.25
	1 x 4.0	54.0	4.0	29.0	50.0 x 25.0	80	5.23	5.91
50/10	1 x 4.0	54.0	4.0	14.0	50.0 x 10.0	66	9.3	10.51
30/2	1 x 2.0	32.0	2.0	4.5	30.0 x 2.5	52	6.44	7.28
20/5	1 x 2.5	22.5	3.0	8.0	20.0 x 5.0	56	8.64	9.76
	1 x 2.5	22.5	2.0	7.0	20.0 x 5.0	63	5.5	6.22
20/3	1 x 2.5	22.5	3.0	6.0	20.0 x 3.0	44	10.96	12.38
18/2	2 x 1.0	20.0	2.0	4.0	18.0 x 2.0	48	7.22	8.16
	1 x 2.0	20.0	2.0	4.0	18.0 x 2.0	45	7.47	8.44
16/5	1 x 2.0	17.5	2.0	7.0	15.5 x 5.0	63	4.93	5.57
16/2	1 x 2.0	17.5	1.5	3.5	15.5 x 2.0	51	5.37	6.07
	1 x 1.5	17.5	2.0	4.0	15.5 x 2.0	46	6.96	7.86
15/4	2 x 1.2	17.4	2.0	6.0	15.0 x 4.0	62	5.13	5.80
15/2	2 x 1.2	17.4	2.0	4.0	15.0 x 2.0	47	7.19	8.12
	2 x 1.0	17.0	1.5	3.5	15.0 x 2.0	50	5.41	6.11
10/10	1 x 2.5	12.5	2.5	12.5	10.0 x 10.0	64	6.25	7.06
6/2	1 x 1.2	7.2	1.2	2.7	6.0 x 1.5	45	4.98	5.63
4/2	1 x 1.2	5.2	0.8	2.5	4.0 x 1.7	53	3.66	4.14
	1 x 1.0	5.0	1.0	2.5	4.0 x 1.5	48	3.70	4.18