




Twilled Dutch Weaving Stainless Steel Wire Mesh Specification

When ordering, please specify:

1. Weave Type
2. Mesh (Warp x Weft)
3. Wire Diameter (D1,D2)
4. Aperture (μm)
5. Roll Width (RW)
6. Roll Length (RL)

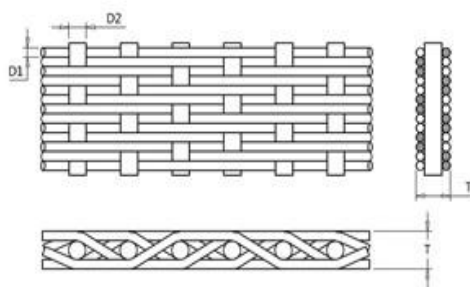

Twilled Dutch Weave

Technical Parameter

Mesh	Wire D2 x D1		Absolute Filter	Square Meter Weight	
Warp x Weft	mm	inch	μm	kgs	lbs
20 x 250	0.25 x 0.20	0.0098 x 0.0078	110 - 120	2.81	6.18
30 x 360	0.25 x 0.15	0.0098 x 0.0060	90 - 100	2.50	5.50
80 x 700	0.11 x 0.08	0.0043 x 0.0031	35 - 38	1.37	3.01
90 x 780	0.11 x 0.07	0.0043 x 0.0031	25 - 38	1.23	2.71
100 x 760	0.10 x 0.071	0.0039 x 0.0027	20 - 30	1.20	2.64
165 x 800	0.07 x 0.05	0.0028 x 0.0020	24 - 26	0.79	1.74
165 x 1400	0.063 x 0.04	0.0025 x 0.0015	15 - 18	0.72	1.58
250 x 1600	0.05 x 0.032	0.0019 x 0.0012	8 - 10	0.56	1.23
300 x 2100	0.036 x 0.025	0.0014 x 0.0009	6 - 8	0.42	0.92
325 x 2300	0.036 x 0.024	0.0014 x 0.0009	4 - 8	0.43	0.94
400 x 2800	0.028 x 0.02	0.0011 x 0.0007	4 - 7	0.34	0.74
500 x 3500	0.025 x 0.015	0.0009 x 0.0005	3 - 5	0.27	0.59

Note: Absolute filter values above should be taken as just rough estimations.